


Air Mover / Industrial Vacuum Loader

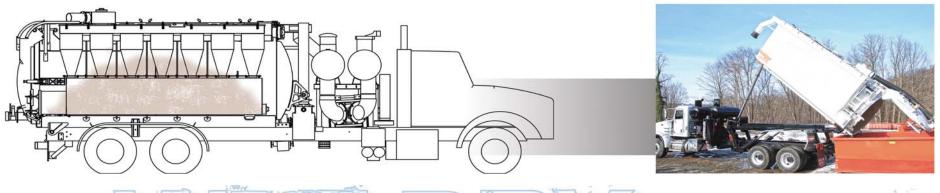

POWER FERFORMARCE VERSAULTY.

VACUUM SYSTEM:

Positive Displacement Pump; 5,250 CFM, 28" Hg; 500 HP Transfer Case with air-shift engagement. Specially designed ultra-quiet air injection and discharge silencers. The HV-57 comes standard with a tailgate porthose (boom options are available).

FILTRATION:

Our patented wet/dry single-mode filtration system includes a top loading debris tank, debris body baffle, a 12" stainless steel floatball shutoff, seven cyclone centrifugal material separators, 46 Snap-ring type filters with heavyduty galvanized cages, and a safe working area on top of the collector body.

DEBRIS BODY:

The HV-57 offers a 17 cubic yard debris body made from 1/4" EXTEN steel. Full opening tailgate with field-adjustable hinge and dual cylinders. Four fail-safe, individually adjustable locks that assure a complete seal. Heavy-duty, double acting lift cylinder provides a stable 45° dump angle.

Other Features include:

Noise and vibration dampening mounts on the blower and transfer case; high-efficiency, low maintenance all steel air duct construction with clean out access; 20" body access manway; and full bearing body pivot; heavy-duty electric vibrator with thermal overload protection; super heavy-duty rear splash plate; body and tailgate safety props.

HIGH DUMP:

72" Dump height in fully raised position with body down

61" Dump height in fully raised position with body dumped

22" Rearward travel

See full lists of features and options on our website.

OPTIONS:

Stainless steel debris body
Top loading, hydraulic booms
Tailgate splash shield
Liquid load indicator
Various toolboxes, tube racks, and
tube trays
Auger unloading system
Sludge pump off-loading system
Washdown System
Various lighting options
Wireless pendants/remotes

See website for complete listing

