

# BENLEE

Up to 46,000# + Legal Payload

25'11" Long



Model: TASMTC26S - Dual Cylinder



Model: TASM28S - Canadian Spec



**Carries A Lot More For A Lot Less!!**

Model: TASM26S - Single Cylinder

## SUPERMINI ROLL OFF TRUCK REPLACEMENT

# SUPERMINI TRAILER

## Models Available:

TASM26S - Single Cylinder  
TASMT26S - Dual Cylinder  
TASM28S - Canadian Specs




## Features

- LENGTH WITH TRACTOR, SIMILAR TO TRUCK (TRAILER IS 25' 11")
- TARE WEIGHT OF **ONLY 12,000#** (12,400# Super Mini D)
- **UP TO 44,980#+ LEGAL PAYLOAD\*** (44,580# Super Mini D)
- HIGH UPTIME TRAILER
- CARRIES 24' LONG CONTAINERS-20, 30, 40 OR TALL 50 YARD BOX
- FAST SINGLE REEVING & SINGLE OR DUAL LIFT CYLINDERS W/60,000#
- STINGER TAIL PROVIDES EXCELLENT DUMPING ANGLE
- ALL CYLINDER RODS CHROME PLATED
- 10" x 4" x 3/8" 50,000# MIN. YIELD UPPER FRAME
- 4" SIDE ROLLERS MOUNTED PIN THROUGH TUBE, WITH ROLL PINS
- REEVING SLIDE PLATE W/GREASABLE SIDE ROLLERS
- 80,000# MIN. YIELD FABRICATED WIDE FLANGE LOWER FRAME
- BRAND NAME SPRING SUSPENSION RATED @ 25,000# PER AXLE
- BRAND NAME AXLES RATED @ 25,000# EACH, SYNTHETIC GREASE
- HOLLAND LANDING GEAR
- QUARTER REAR STEEL DIAMOND PLATE FENDERS
- GREASABLE GROOVED BRONZE BUSHED ROLLERS & SHEAVES
- LED LIGHTING
- HEAVY WALL 1" CHROMIUM TRIVALENT PLATED HYD. TUBING
- PARKER 1" TOUGH COVER HYDRAULIC HOSES RATED 3,000 PSI
- SECONDARY IN-LINE ABS FILTER
- 10 BOLT HUB PILOTED STEEL WHEELS
- 11R22.5 STEEL BELTED TIRES, 16 PLY RATED
- SANDBLAST, PRIME AND PAINT WITH INDUSTRIAL ENAMEL
- BRAKE CONTROL-SPRING LOADED
- MAIN CONTROL VALVE-DISTANCED FROM OPERATOR
- CABLE 7/8" SECURED WITH BECKET
- KING PIN WITH GREASE ZERKS
- PRESSURE GAUGE

## Benefits

TRACTOR/TRAILER MORE MANEUVERABLE  
EXTREMELY LIGHT; MAXIMIZES LEGAL PAYLOAD  
PAYLOADS MUCH MORE THAN ROLL OFF TRUCK  
TRACTOR/TRAILER MEANS HIGH EQUIP. UTILIZATION  
LARGER THAN INDUSTRY STANDARD  
REDUCES MAINTENANCE BY 50%. LESS WEIGHT.  
DUMP LOADS COMPLETELY/EFFICIENTLY/SAFELY  
LONGER LIFE AND EASE OF REBUILD  
EXCEEDS INDUSTRY STANDARD OF 8", ADDS STRENGTH  
ROBUST DESIGN, NO WELDED PLATE TO BREAK OFF  
LONG LIFE, REDUCES FRICTION, INCREASES CAPACITY  
DESIGNED FOR MAXIMUM CAPACITY, LONGER LIFE  
PARTS AVAILABLE NATIONWIDE  
10% STRONGER THAN INDUSTRY STANDARD, LOW MAINT.  
LIGHTER TARE WEIGHT  
LIGHT WEIGHT YET VERY DURABLE  
SMOOTHER OPERATION; LONGER LIFE  
MOISTURE AND VIBRATION RESISTANT, LONGER LIFE  
CORROSION RESISTANT, ADDS LIFE, SPEED TO SYSTEM  
RESISTS ABRASION, ADDS LIFE, SPEED TO SYSTEM  
ADDS 100,000 MILES OR 1 YEAR TO ABS WARRANTY  
INDUSTRY STANDARD; AVAILABLE NATIONWIDE  
INDUSTRY STANDARD; AVAILABLE NATIONWIDE  
LONG LASTING, DURABLE FINISH  
ADDED SAFETY, REDUCES LOAD & UNLOAD TIME  
ADDED SAFETY, PROTECTION  
SAFETY AND REDUCED MAINTENANCE  
EASY MAINTENANCE, LONGER PLATE LIFE  
SIMPLE CHECK OF HYDRAULIC SYSTEM

\*BASED ON STATES ALLOWING 73,280# GVW w/16,000# TRACTOR, FEDERAL BRIDGE LAW MAY APPLY; (including container)

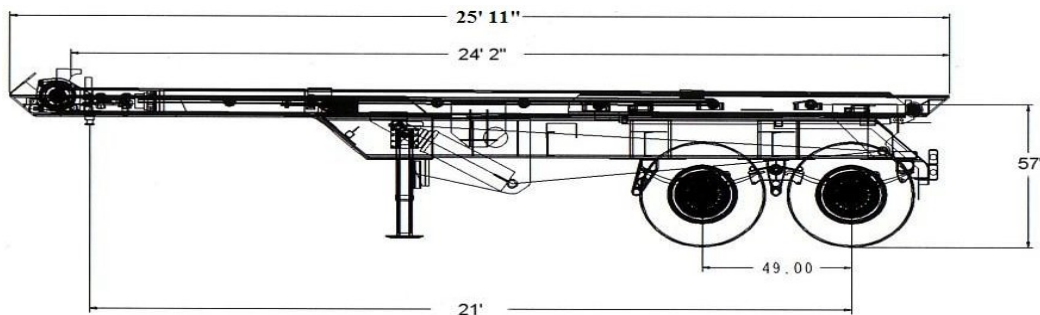

## BENLEE

30383 Ecorse Road - Romulus, MI 48174  
Tel. 734-722-8100  
[www.benlee.com](http://www.benlee.com)

## OPTIONS

- Tarping System
- Auto Inflation
- High Pressure In-Line Filter
- Air Ride Suspension
- Inside Cab Controls
- Tool Box
- Work Lights
- Aluminum Wheels
- Aluminum Fenders
- Plastic Fenders
- Mounted Oil Tank
- Inside/Outside Rail

We reserve the right to make changes at any time without notice.